




POWAPACS LTD DIGITAL RADIO Model:DAB-PC1

Feature

- 1.The unit is with both DAB/DAB+ and FM receiver.
- 2.Receiver phone music to the unit by bluetooth wireless. (Connecting cellphone via Bluetooth to play music)
- 3.Stereo output.

Accessories

- DAB radio :1pcs
- USB line: 1 pcs
- User guide :1 pcs

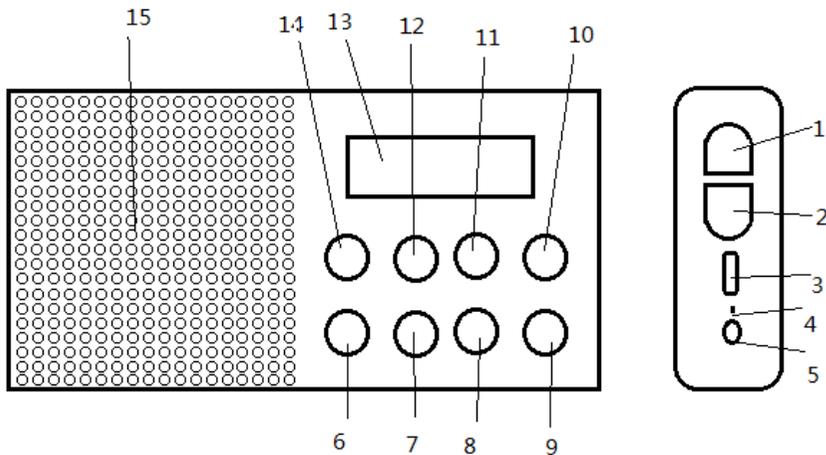

- 1: vol+ button
- 2: vol- button
- 3: type-c jack

- 4:charge led light
- 5:earphone jack
- 6:mode button
- 7:previous button
- 8:enter/scan button
- 9:next button
- 10:power button
- 11:back button
- 12:menu/info button
- 13:disply
- 14:preset button
- 15:speaker

Type-c Jack : 5V dc-in battery charge

Earphone jack: plug the headset and the sound is output only from the headset.

Operating instructions :

power: Press and hold the mode key 3s to turn on, long press again to turn off.

Preset: Up to 40 channels are preset on DAB and FM. Dab and FM mode, long press store program short press recall program.

INFO/menu: short press View program information and long press into the setup menu.

Back: exit menu or go back to the previous level

OK/Scan: long press 3s automatic search in DAB and FM mode

Prev: previous channel

Next: next channel

Vol+/-: Adjust the volume up or down

mode: short press DAB.FM.BT mode to cycle switch

BT MODE: Search the product model link with the mobile phone, press the volume - or wait 10 seconds to return to the playback interface

SETUP: long press info/menu to enter the setting interface

1. **Full Scan** :short preset can auto search. function is same as long press SCAN button
2. **Manual tune** :manually select frequency search.
3. **Prune** : choose whether or not to remove invalid stations
4. **Backlight**: Screen protection and brightness adjustment
5. **Time/Date**: Time and date adjustment and display effect setting
6. **Alarms**: Alarm clock setting, alarms1 and alarms2
7. **Sleep**: Sleep power saving setting
8. **Language**:9 language display options

9. **Factory Reset** :Enter to restore factory settings

10. **System Version**: View version number

DAB/FM mode:

- 1.Short mode to dab mode , “DAB”/”FM” will be displayed on the screen.
- 2.Put out the telescopic antenna.
- 3.Long press the SCAN key, the screen scan display” scanning.....” the program will be automatically stored in a moment.
- 4.Adjust vol+/- and press prev or next. You can choose the radio station.

BT mode:

- 1.Short mode to BT mode , “BT” will be displayed on the screen.
- 2.Open the BT switch on your mobile phone and search “QM_PC3” connect .
- 3.Turn on the music on the phone ,then the music can play on the radio

Product Specification

- This digital audio broadcasting device is fully compatible with DAB ETSI 300 401 standard. Support ETSI TS102 563 DAB+ standard
- FM Frequency range 87.5-108MHz
- DAB Frequency range 170-240MHz
- Receiver sensitivity -99dBm
- Bluetooth ver: v5.0
- Micro usb 5V DC-in
- 3.5mm Stereo Headphone Output
- Antenna input: telescopic antenna.
- Built in 2000ma 3.7V 18650 lithium battery
- Temperature: 0 °C~45°C
- Storage temperature: -20°C-70°C

Product Maintenance

- ◇ Don't expose the unit to the liquid, humid or moist area as the set is not water proof.
- ◇ Don't attempt to clean this unit with chemical solvents as this might damage the finish.
- ◇ Avoid extreme temperature either hot or cold, recharge under normal temperature.
- ◇ Don't touch sharp objects, which will cause scratches or damage
- ◇ Don't attempt to insert any object into the body to avoid damage the internal parts.
- ◇ Don't attempt to disassemble the unit for there is not any serviceable parts inside.
- ◇ If long time no use, be sure to play the unit in a dry area, avoid in a temperature changes and dusty place.
- ◇ Please save after rechargeable fully when unused for a long time (one-two month), to avoid completely discharge normally which lead to open improperly or not rechargeable.